


# SPECIFICATION

PARAMETER	METHOD / DEVICE
WEIGHT	Digital scale Axis (precision 0,01g)
HEIGHT	Gawis-OD Agr / Electronic altimeter (precision 0,01mm)
TOP LOAD	Top Load Agr / Digital Newton meter BFG N (0,1-500N)
DIAMETER	Gawis-OD Agr / Micrometer of 0,001mm precision, according to DIN 863
COMPONENTS	Gawis-OD Agr / Digital caliper of 0,01mm precision, according to DIN 862
MATERIAL DISTRIBUTION	Gawis-OD Agr / PTG5004 AGR
TOTAL CAPACITY AND FILLING HEIGHT	Combi Agr
HORIZONTAL AND VERTICAL ALIGNMENT	Gawis-OD Agr / Angle gauge, according to DIN 875/0 + Gap gauge (0,05-1,0mm) ( max. 1,0mm/100mm)
STABILITY ON THE SURFACE	Flat marble slab + Gap gauge (0,05-1,0mm)
COLOUR	Spectrophotometer Ci5 (laser measurement) according to standard
DROP TEST	Trap on 1,5m height
TIGHTNESS	Vacuum chamber (underpressure of 600mbar during 180s.)
<b>PRODUCT IMPLEMENTATIONS AND QUALITY ANALYSIS ARE PERFORMED WITH THE USE OF THE FOLLOWING DEVICES: Agr Gawis-OD, Top Load/Combi, PTG5004</b>	


## TECHNICAL DRAWING

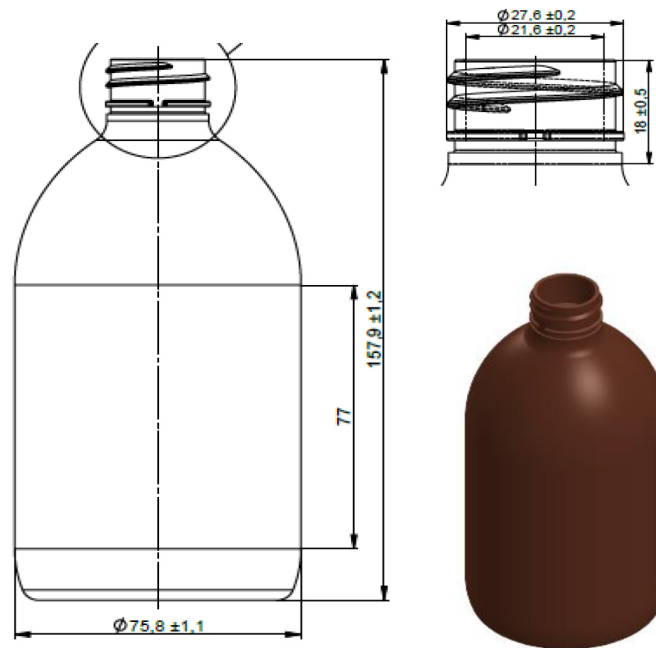

<b>Capacity:</b>	500 ml
<b>Thread:</b>	28-410
<b>Material:</b>	polyethylene terephthalate

Parameters	Given dimensions	Tolerance
Height (mm)	157,90	+/- 1,2
Diameter of base (mm)	75,80	+/- 1,1
Weight (g)	28,00	+/- 1,0
Total capacity (ml)	532,00	+/- 11,0
Distance to the cap (mm)	18,00	+/- 0,5
Outer diameter of the collar (mm)	27,60	+/- 0,2
Inner diameter of the hole (mm)	21,60	+/- 0,2
VERTICAL (max 1/100mm)	V	V
IT SHRINKS ON SURFACE SECONDARY	X	-
SHAPE CONFORMITY	V	-
STABILITY BASE BOTTLE	V	-

## VISUAL PACKAGING

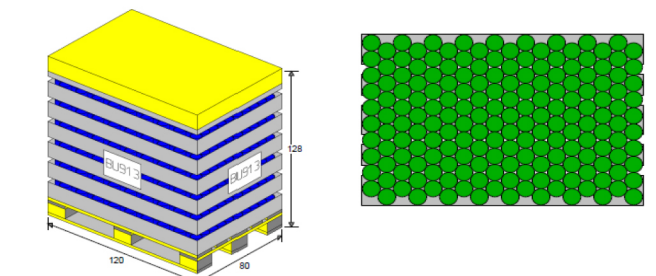

PACKAGING	
ON PALLET	1190
LAYERS	7
ON LAYER	170
PALLET HEIGHT	1280,00 mm

09.02.2021

-----  
date, authorised person signature